




DOUBLE OPENING WITH 3 PANELS FOR 10 ENDOSCOPES

Available in pass-through and not pass-through version.

The **DRS-218** is equipped with a connection kit for each position and all the connectors necessary to link the most important endoscopes brands available on the market.



The universal trolley **EC-216** is designed on completion of the system. It can store up to 5 trays, available in the version without door, with glass door or steel one.

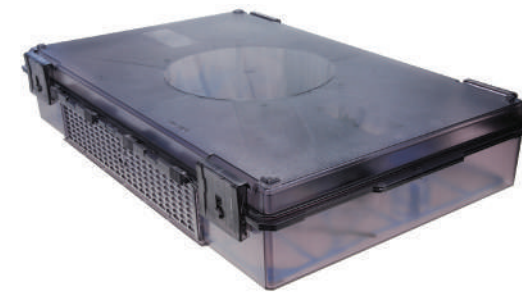

Ver. 1/2018 gianluca@mdg.com

# DRS-218

vertical drying cabinet for the aseptic storage of flexible endoscopes validated for 800 hours



MEDICAL DEVICES GROUP Srl  
Via G.Fracastoro, 1 48124 Ravenna (RA)  
Tel +39 0544 1826013 - Fax +39 0544 1826015  
www.mdg-srl.com - info@mdg-srl.com



Complies with the Directive 93/42/CEE Annex VII



# DRS-218

vertical drying cabinet for the aseptic storage of flexible endoscopes - validated for 800 hours

The **DRS-218** is an air-heated vertical cabinet managed by a PLC through a 7" 16:9 HD touch screen display. Designed to store up to 10 flexible endoscopes aseptically and vertically up to 800 hours.

**Compliance with standards UNI EN 16442, Class I.** Independent monitored flow rate of the endoscopes channels.

The traceability software provides access to

the most important hospital computer systems through Ethernet connection.

Its 10 vertical separated positions allow a versatile use of the system and a rapid drying of the endoscopes avoiding cross infection risks.

It preserves the correct sterile air flow pressure inside in every condition avoiding contaminations, foundations of the norm itself.



INTEGRATED PRINTER

The **DRS-218** is fully compliant with UNI EN 16442. It preserves the correct sterile air flow pressure inside in every condition avoiding contaminations, foundations of the norm itself. (Checked and controlled by PLC).



FRONT ACCESS FOR SERVICE

For a proper operation a standard electrical connection is sufficient, no obligation of additional connections or electrical wirings. (Optional internal medical-grade air compressor).

+

Aseptic storage and compliant with UNI EN 16442

+

Italian technology and design



**Alarm system through operator recognition.**

In the endoscope is removed without authorization (operator ID) the system generates warnings at the facility where it is installed. (It also works independently, e.g. acoustic signal).

The **DRS-218** is provided with standard Ethernet connection and a traceability software (optional), which permits to check all the events during the storage process.



The **DRS-218** printer can be used to track cycles if the Ethernet connection is unavailable.



7" 16:9 HD DISPLAY

BARCODE OR RFID USE

ETHERNET PORT

MEDICAL - GRADE AIR CONNECTION

POWER SUPPLY